

LIFT



**START
ELEVATOR**
OLEODINAMIC COMPONENTS FOR LIFTS



**START
ELEVATOR**
OLEODYNAMIC COMPONENTS FOR LIFTS

Hydraulic components for lifts and Elevators

Design and production of hydraulic components for lifts and elevators.

Since 1967 START ELEVATOR HYDRAULIC has produced "Oleo dynamic Groups for Elevators and Equipment-Lifts". Thanks to "on-site" design and construction of fundamental components, to technological innovation and to the presence of highly specialized staff, START ELEVATOR Srl is able to guarantee product quality and to promptly respond to everything the market requires.

Technology




Thanks to the total domestic production of all components using modern tools and constantly updated, specialized and trained personnel with years of experience, allows Start Elevator to respect the most important prerogative: Product Quality.

Establishment

The Company, founded in a small workshop of few hundred square meters, thanks to continuous investment in research and development of its products, now has a Start Elevator home to more than 5000 square meters with the capacity and flexibility to satisfy every request in a short time.





PUMPUNIT AIR MOTOR

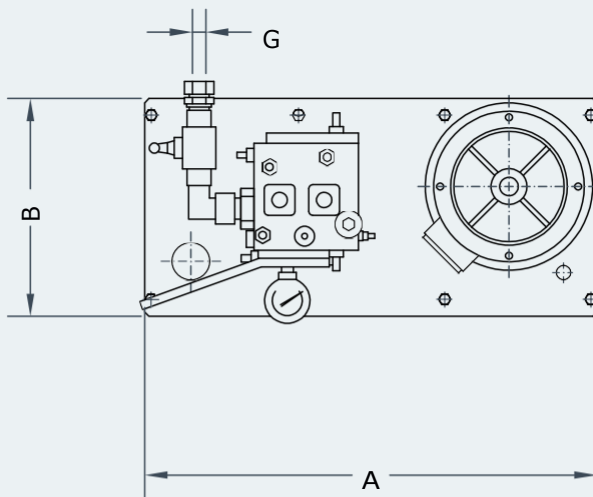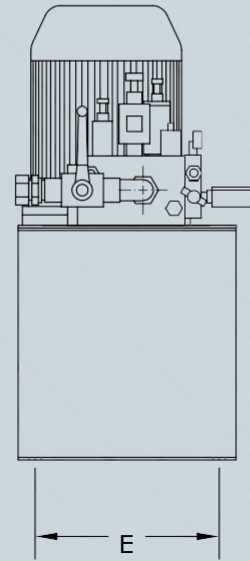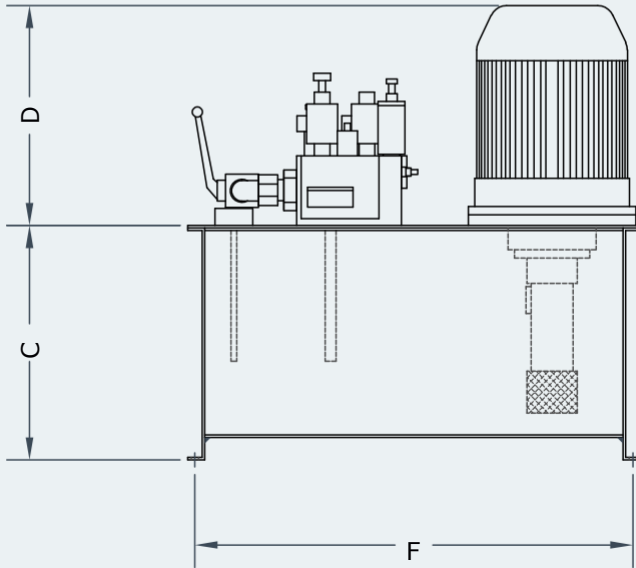


Tank type	Submersible Pump Flow [Lt/min]	Control Valve	Submersible Motor	Rupture Valve	Hose Pipe	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	Tank Capacity [Lt]	Piston Dia [mm]
Minilift PU -SM	35,55	Start 21 E	2.2 Kw(Single Phase), 2.9 Kw(Three Phase)	1"	3/8" - 1"	540	260	280	295	220	523	75	63
Minilift PU -AM	35,55	Start 21 E	2.2 Kw(Single Phase), 2.9 Kw(Three Phase)	1"	3/8" - 1"	540	260	280	295	220	523	75	63

SUBMERSIBLE MOTOR

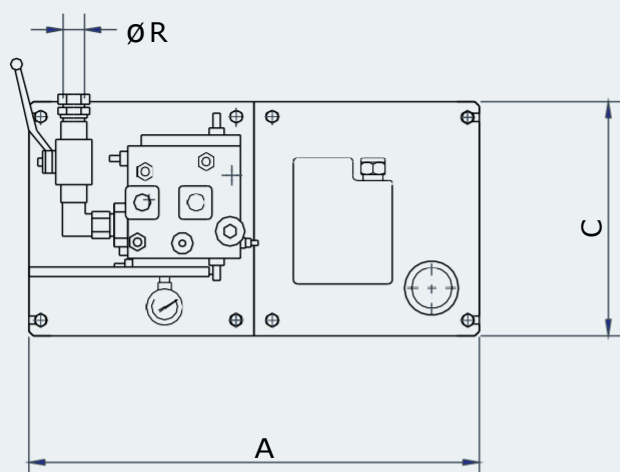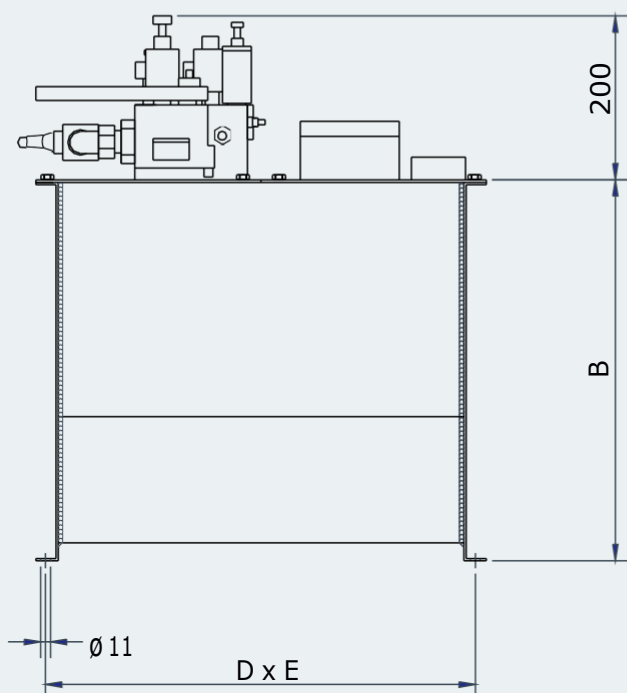

Tank Type	Submersible Pump Flow (Lt/min)	Control Valve	Submersible Motor (Three Phase)	Rupture Valve	Hose Pipe	A	B	C	E	Tank Capacity [Ltr]	Piston Dia [mm]
E lift SPU - SM	100/125/150/250	HEVOS HE 100/250 /650	5.8 Kw,7.7 Kw,9.5 Kw,13Kw,20Kw, 29Kw	1",1"1/4",1 "1/2", 2"	1", 1"1/2 "	680	320	340	270	145	80/90/100/110/120


PUMP UNIT VERTICAL

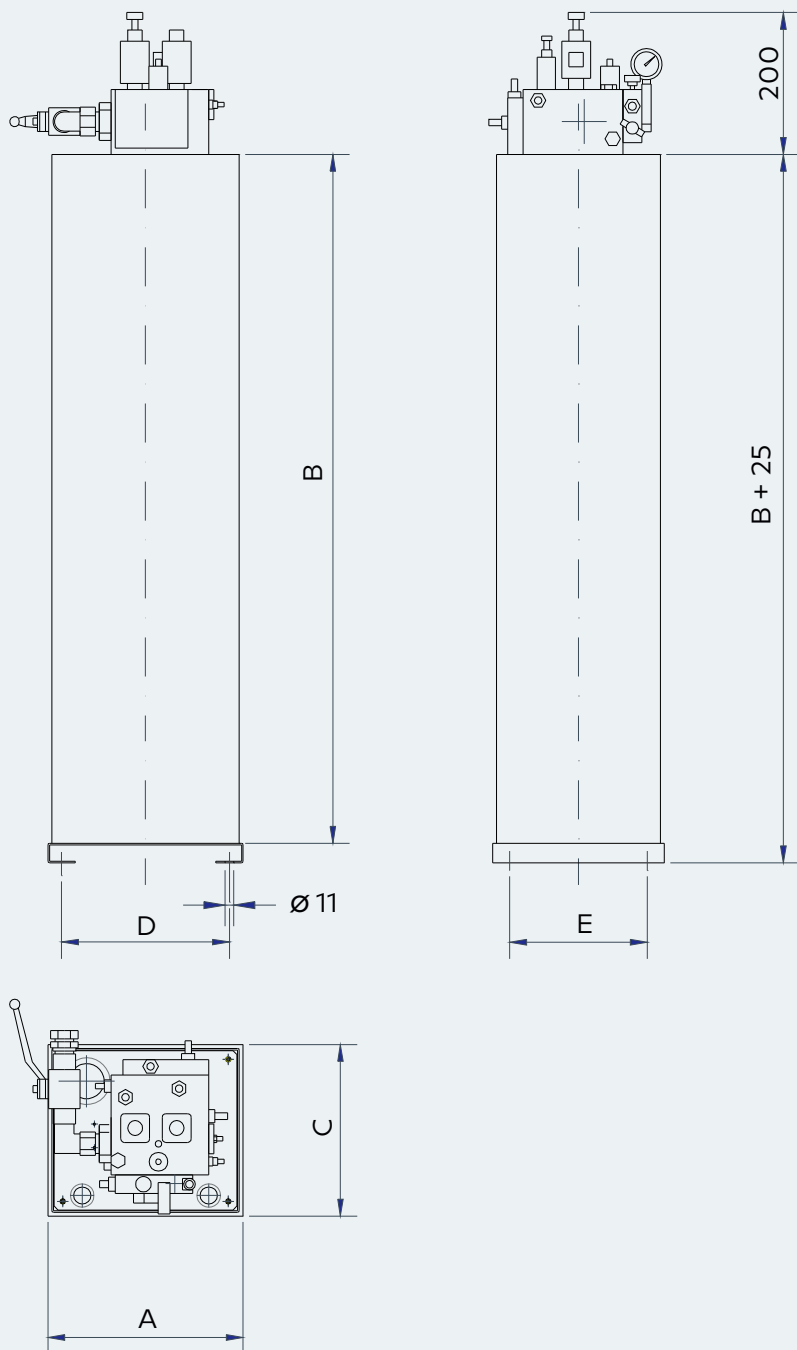

Tank type	Pump type [l/min]	Connector [Gas - mm]	DIMENSIONS [mm]					CAPACITY [litri]		WEIGHT [kg]
			R	A	B	C	D	E	Min.	
HSL/01	8, 12, 16 25, 30	G 1/2 - G 3/4 - 22 G 3/4 - 22	250	900	220	215	176	17	25	50
HSL/02	8, 12, 16 25, 30	G 1/2 - G 3/4 - 22 G 3/4 - 22	250	1200	220	215	176	17	40	55

PISTON SL

PISTONS

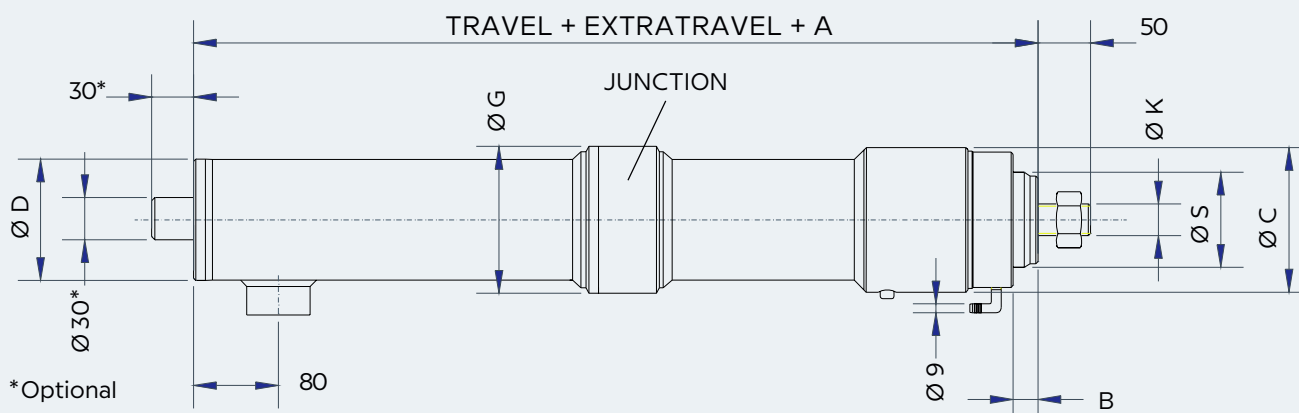

Piston SL features


Small size

Less quantity of oil



PISTON TYPE [mm]		DIMENSIONS [mm]					
ØS	Spessori	A	B	Ø C	Ø D	Ø G	Ø K
80	5-7.5-12	200	23	126	101.6	130	M30
90	5-7.5-12	200	23	137	114.3	139	M30
100	5-7.5-12	200	23	157	133	159	M30

PISTON HOME

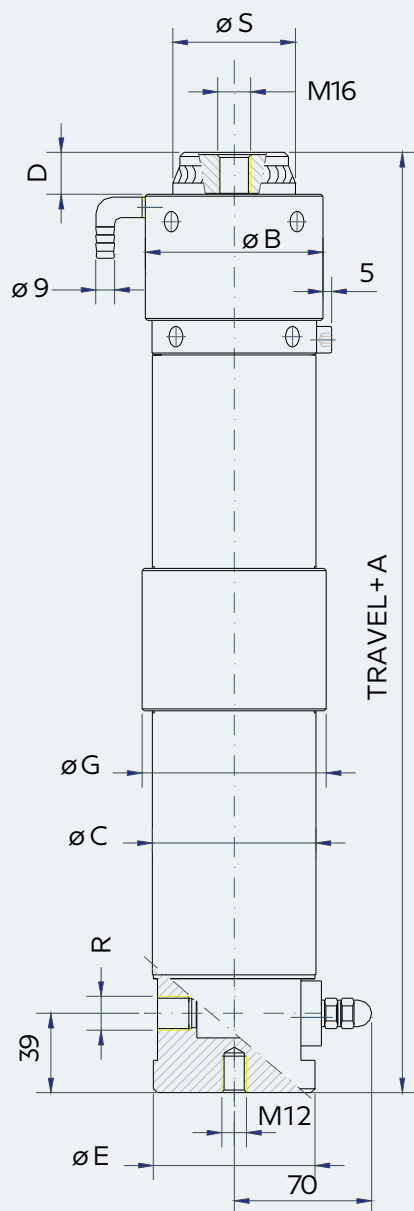


Piston Home features

- Small size
- Less quantity of oil
- Safety valve integrate in the bottom of piston





PISTON TYPE $\varnothing S$ [mm]	A	B	C	D	E	G	R
60	262	87	80	20	79	96	G 1/2
70	262	100	90	20	89	106	G 1/2

PUMP UNIT FOR MACHINE ROOMS

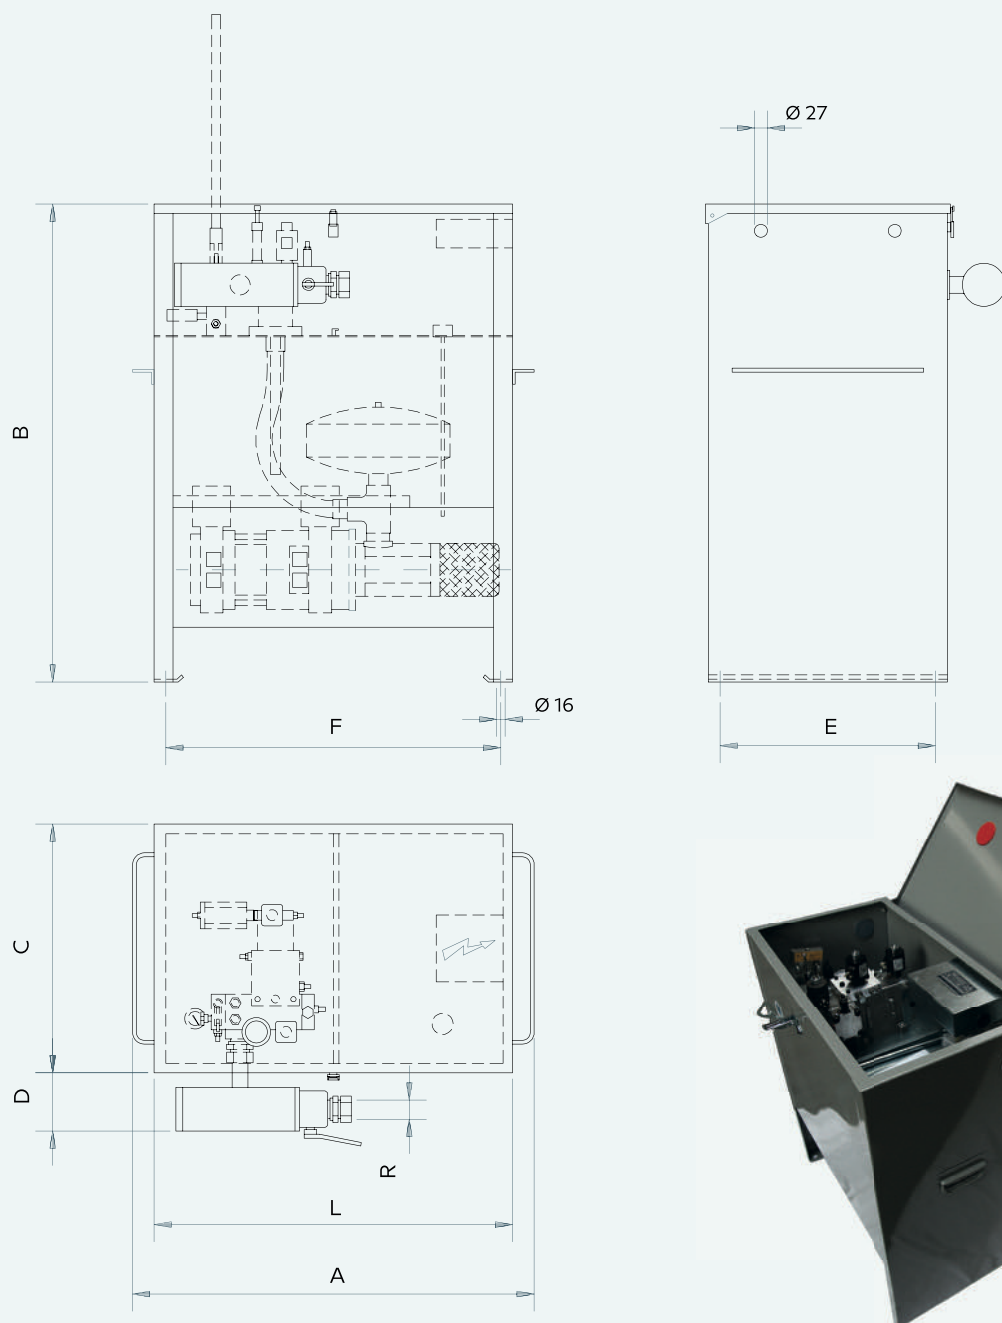


Tank Type	Pump Type [l/min]	DIMENSIONS [mm]								CAPACITY [litres]	
		A	B	C	D	E	F	L	R	Min. Level	Available
90 / 00	55 - 150	830	1000	420	120	370	700	750	35 - G 1"1/4	45	105
90 / 02 / A	150 KW = 16	930	1000	500	120	450	800	850	35 - G 1"1/4	75	150
	180 - 205	930	1000	500	130	450	800	850	42 - G 1"1/2	75	150
90 / 02	180 - 205 KW >= 20	1080	1000	600	130	550	950	1000	42 - G 1"1/2	100	210
	250 - 300	1080	1000	600	130	550	950	1000	42 - G 1"1/2	100	210
90 / 03	250 - 380 KW >= 24	1180	1100	600	130	550	950	1100	42 - G 1"1/2	110	300

PUMP UNIT MRL

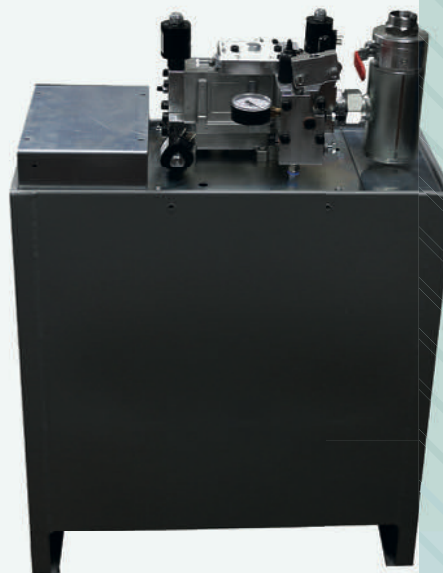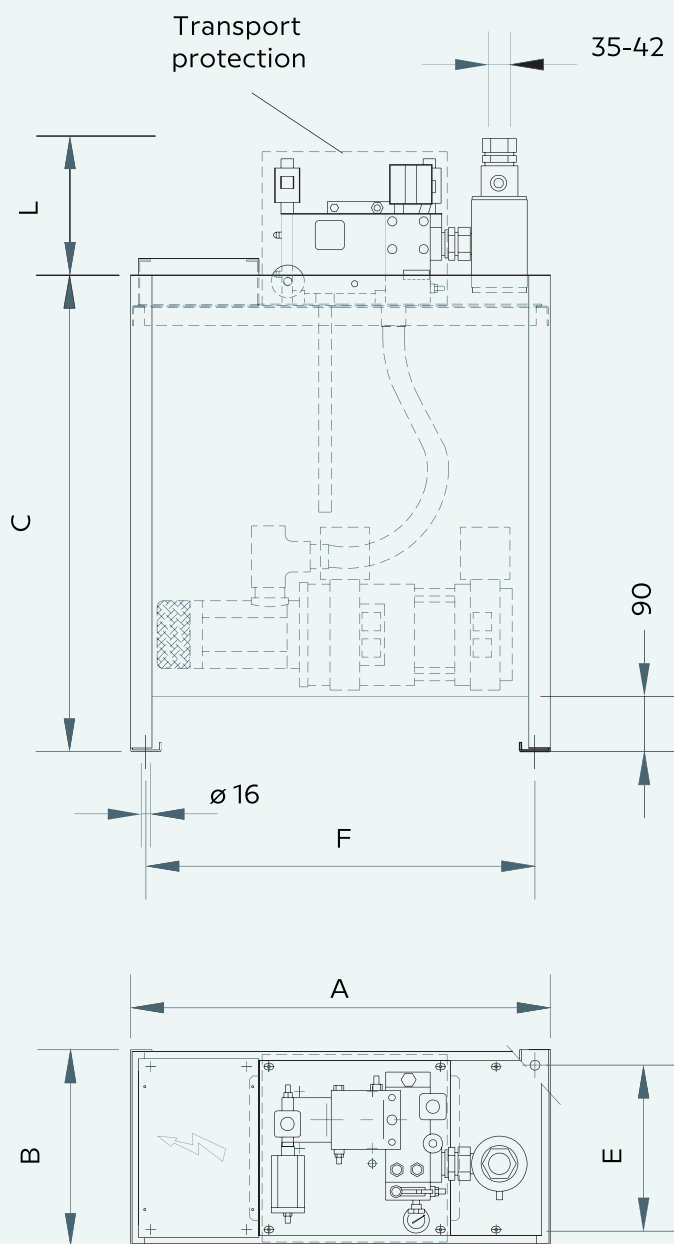




Tank type	Pump type Max	DIMENSIONS [mm]						CAPACITY [litres]		WEIGHT [Kg]
		A	B	C	E	F	L	Min. Level	Available	
93 01 SL	150 l/min 12 kW	680	320	740	270	630	250	40	85	130
93 02 SL	205 l/min 20 kW	780	320	740	270	730	250	47	97	135
93 02A SL	250 l/min 20 kW	830	420	740	370	780	250	58	120	150
93 03 SL	380 l/min 40 kW	950	600	740	550	900	250	95	190	250

PUMP UNIT WHIT AIR MOTORS

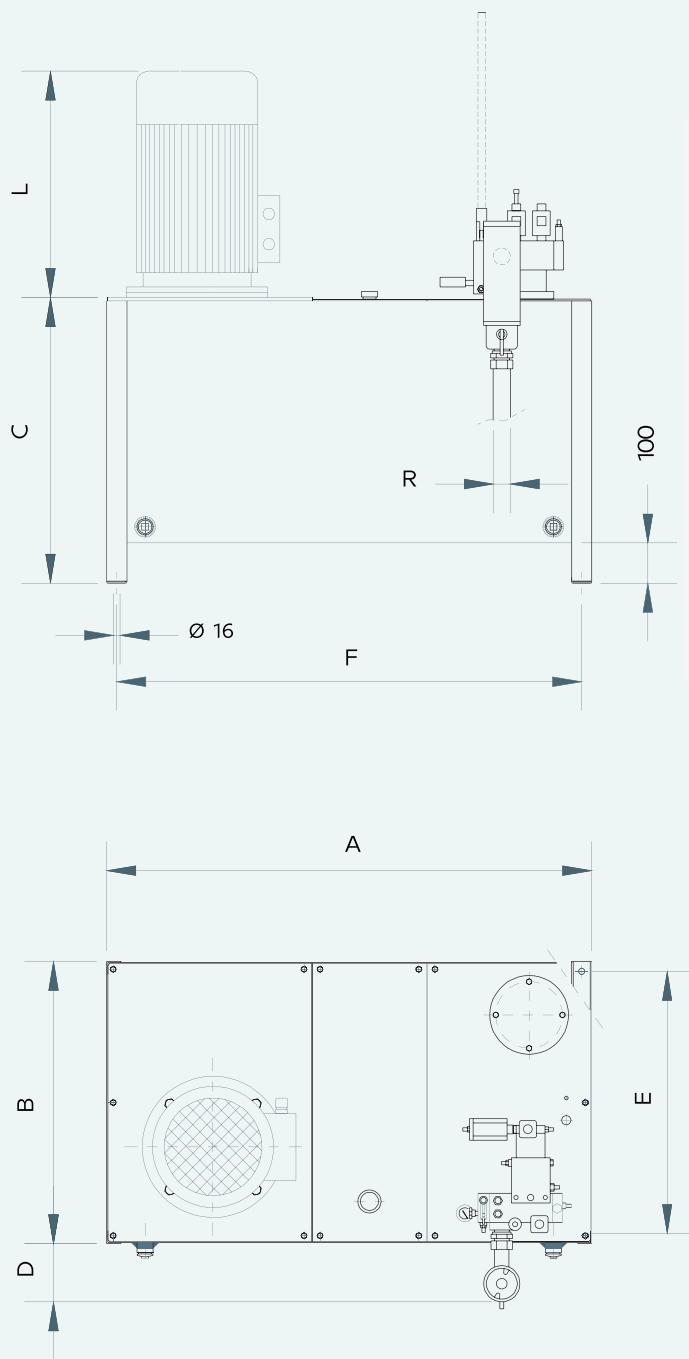


Tank Type	Pump Type [l/min]	Motor Type [kW]	DIMENSIONS [mm]								CAPACITY [litres]	
			A	B	C	D	E	F	L	R	Min.Level	Available
02 / 03	55 - 150 180 - 250	5.5 - 22	1100	600	700	120 130	550	1050	600	35 - G 1 ¹ / ₄ 42 - G 1 ¹ / ₂	65	230
02 / 04	250 - 380	30 - 37	1200	700	700	130	650	1150	700	42 - G 1 ¹ / ₂	70	300
02 / 07	440 - 660	15 - 75	1400	750	920	165	700	1350	800	G 2"	115	550

PUMP UNIT AE

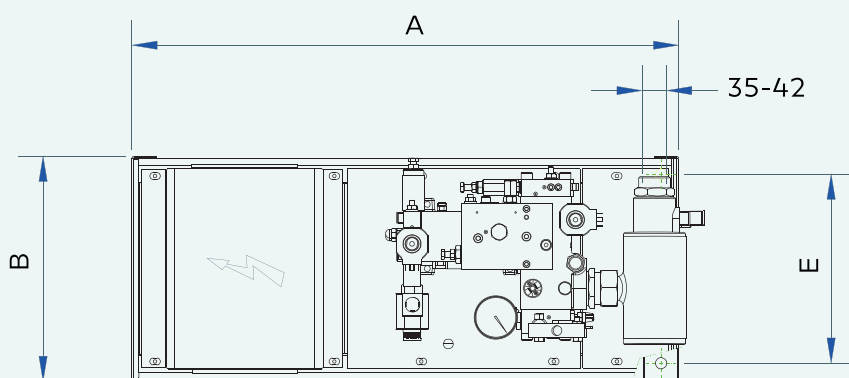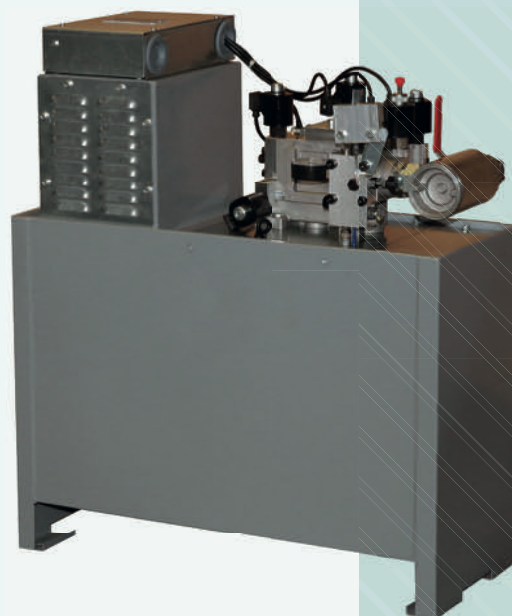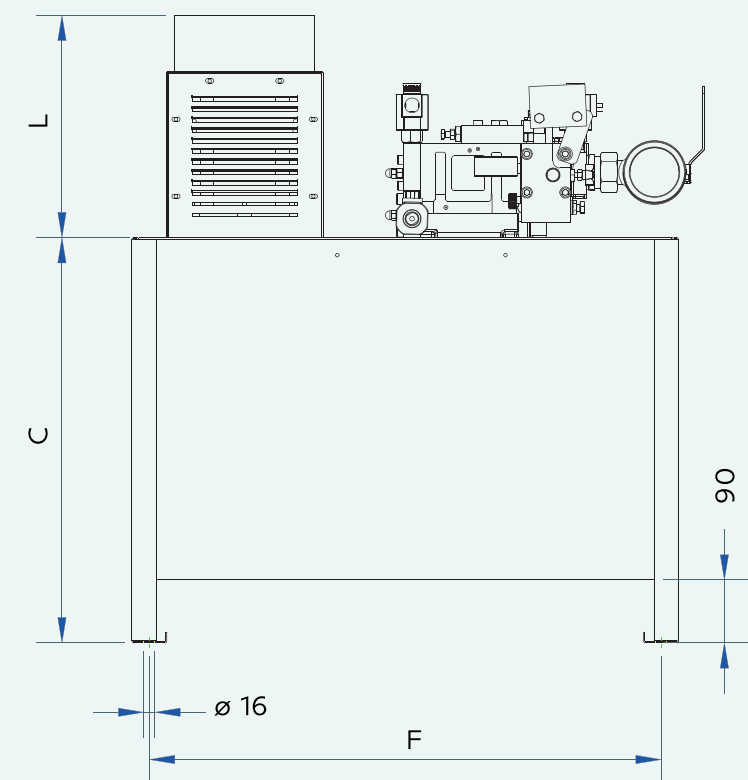


Tank type	Pump type Max	DIMENSIONS [mm]						CAPACITY [litres]		WEIGHT [Kg]
		A	B	C	E	F	L	Min. Level	Available	
93 02 SLAE	55-70	780	320	580	270	730	320	17	64	130
	100-150	780	320	580	270	730	320	17	73	130
93 02A SLAE	55-70	830	420	740	370	780	320	44	89	150
	100-150	830	420	740	370	780	320	44	102	150
	180-205	830	420	740	370	780	320	44	112	150


INDIRECT ACTING 2:1

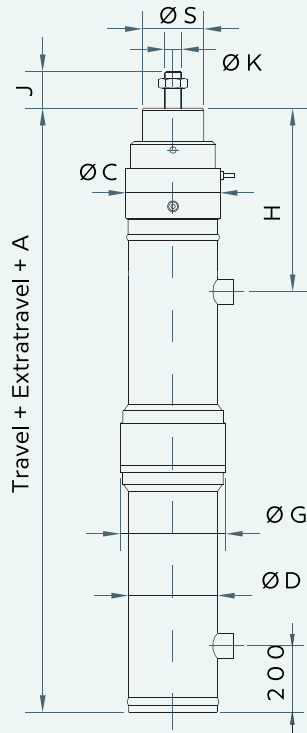

DIRECT SIDE ACTING WITH PLATES

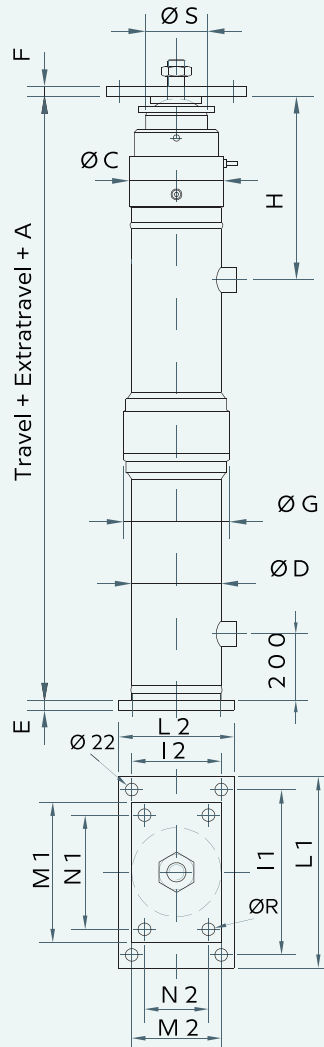

DIRECT CENTRAL ACTING

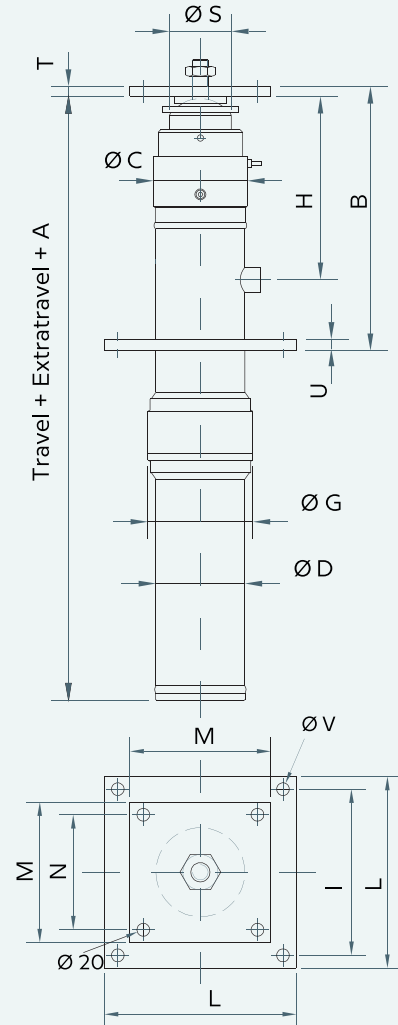


Upper and lower plates are supplied in the side direct execution only if requested

Rif.	DIMENSIONS [mm]																						
Ø S	A	A1	B	Ø C	Ø D	E	F	Ø G	H	Ø K	J	I	I1 x I2	L	L1 x L2	M	M1xM2	N	N1xN2	Ø R	T	U	Ø V
60	262	262	560	114	101,6	20	20	130	345	M30	45	200	250x80	240	300x130	240	250x150	200	200x100	20	15	20	20
70	262	262	560	114	101,6	20	20	130	345	M30	45	200	250x80	240	300x130	240	250x150	200	200x100	20	15	20	20
80	272	272	560	132	114,3	20	20	139	355	M30	45	260	250x120	300	300x170	300	250x150	260	200x100	20	15	20	20
90	272	272	560	150	133	20	20	159	355	M30	45	260	250x120	300	300x170	300	250x150	260	200x100	20	15	20	20
100	272	272	560	157	139,7	20	20	168	355	M30	45	260	250x120	300	300x170	300	250x150	260	200x100	20	15	20	20
110	282	282	560	168	159	25	20	193	360	M30	45	360	350x160	400	400x210	300	250x150	260	200x100	20	20	30	20
120	290	290	600	177	159	25	20	193	368	M30	45	360	350x160	400	400x210	300	250x150	260	200x100	20	20	30	20
130	285	285	600	202	177,8	25	20	218	388	M30	50	360	350x160	400	400x210	300	250x150	260	200x100	20	20	30	20
150	325	325	600	218	193,7	25	25	242	393	M30	55	360	350x200	400	400x250	300	300x200	260	250x150	22	25	30	20
180	380	380	600	270	244,5	25	25	325	423	M30	55	460	400x230	500	450x280	300	300x200	260	250x150	22	25	40	20
200	380	380	600	298	273	25	30	375	415	M30	70	460	400x270	500	450x320	400	400x300	360	350x250	24	30	40	20
230	458	488	750	323	298,5	30	30	383	500	M30	/	520	450x300	600	500x350	400	400x300	360	350x250	24	30	40	32
280	555	585	750	405	355,6	30	35	/	530	M45	70	520	550x360	600	600x410	500	500x400	460	450x350	26	35	45	32

TELESCOPIC PISTONS

PISTONS

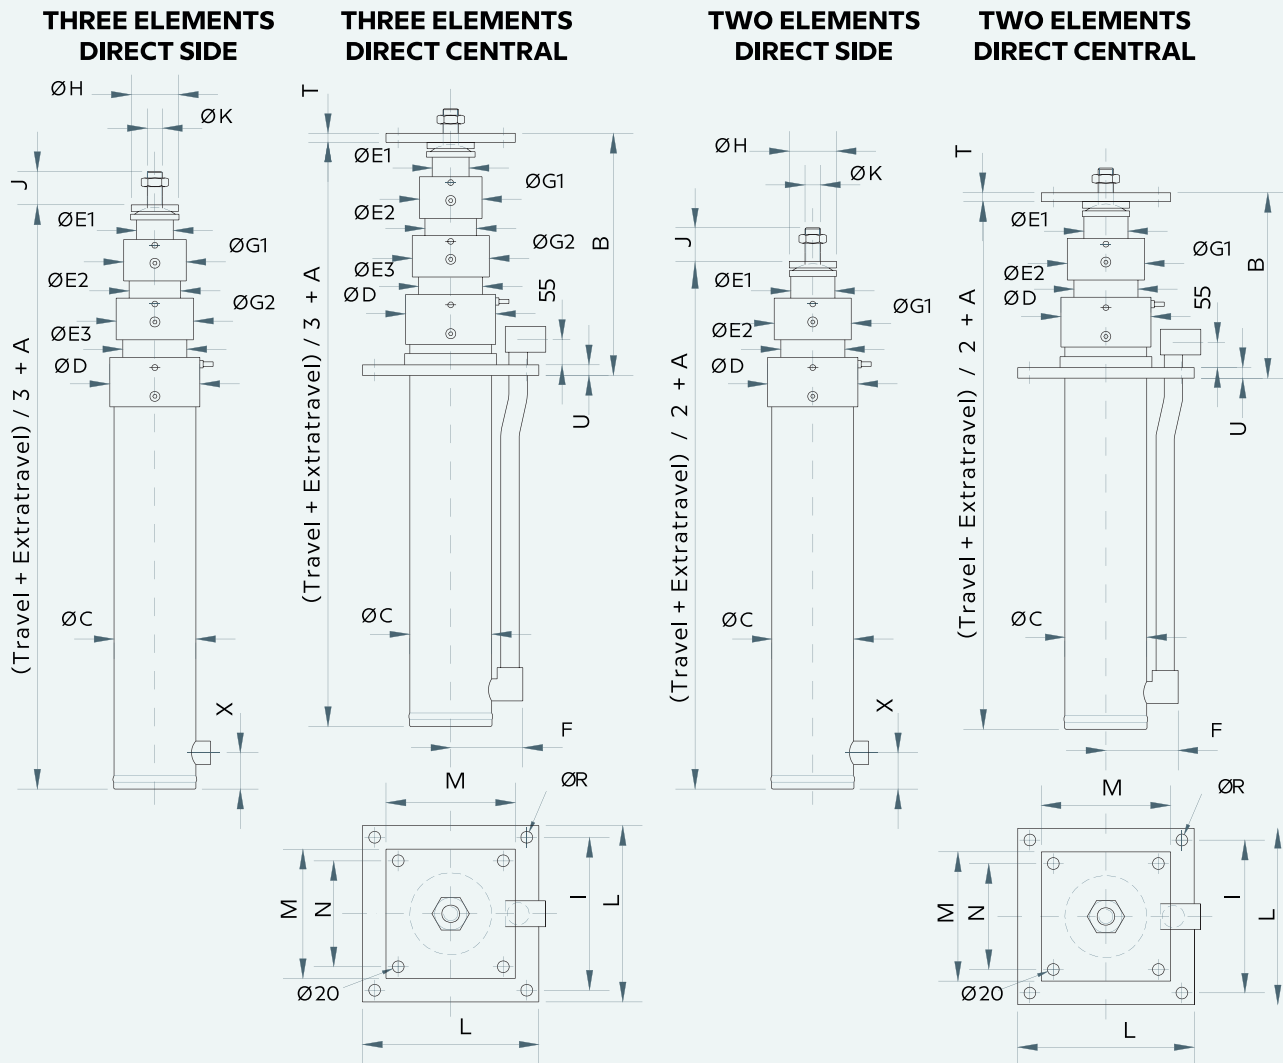

Elements Number	Piston Type	DIMENSIONS [mm]																				
		A	B	ØC	ØD	ØE1	ØE2	ØE3	F	ØG1	ØG2	ØH	ØK	J	I	L	M	N	ØR	T	U	X
TWO	(2) 46/2	425	365	80	100	35	55	/	110	74	/	70	M16	53	250	300	240	200	20	15	20	50
	(1) 60/2	378	380	100	106	48	70	/	120	83	/	85	M20	53	250	300	240	200	20	15	20	50
	78/2	555	420	130	150	64,5	89	/	140		/		M30		310	420	240	200	20	15	25	50
	85/2	555	420	140	160	70	98	/	145	116	/	100	M30	53	310	420	240	200	20	15	25	50
	103/2	630	450	165	190	85	118	/	160	137	/	100	M30	52	310	420	300	260	20	20	25	55
	120/2	670	460	190	220	97	140	/	175	161	/	100	M30	52	370	500	300	260	24	20	30	60
	141/2	750	480	229	254	120	160	/	205	188	/	150	M30	54	370	500	300	260	24	25	35	65
	170/2	840	530	273	300	146	190	/	230	215	/	150	M30	54	450	600	300	260	24	25	40	70
205/2	910	560	324	350	180	228	/	255	256	/	200	M30	57	500	600	360	320	24	30	45	70	
THREE	58/3	680	520	120	135	35	55	76	140	74	96	70	M16	53	250	300	240	200	20	15	20	55
	75/3	735	550	150	170	48	70	98,5	150	89	118	85	M20	53	310	420	240	200	20	15	25	55
	98/3	835	585	190	215	64,5	89	130	170	106	149	100	M30	42	310	420	240	200	20	20	25	55
	107/3	855	585	210	240	70	98	140	185	116	161	100	M30	53	370	500	240	200	24	20	30	60
	127/3	955	660	245	280	85	118	165	200	137	188	100	M30	52	370	500	300	260	24	20	35	65
	127/3 LV	975	680	245	280	85	118	165	200	137	188	100	M30	52	370	500	300	260	24	20	35	65
	150/3	1020	680	298	325	97	140	197	240	161	215	100	M30	54	450	600	300	260	24	25	40	70
	150/3 LV	1040	700	298	325	97	140	197	240	161	215	100	M30	54	450	600	300	260	24	25	40	70
	176/3	1115	715	355	380	120	160	230	265	188	256	150	M30	54	500	600	300	260	24	25	45	75
176/3 LV	1135	735	355	380	120	160	230	265	188	256	120	M30	54	500	600	300	260	24	25	45	75	

(1) replaced by the piston 77/2 (page 10151)

(2) for 60/2 DL Home piston version see page 10153

Electronic Pump Unit with Hevos Valve

Salient Features



- Amendment A3 Integrated
- High Comfort During the Stroke
- Controlled by Stepper Motor
- Energy Saving
- Low Noise



First class ride quality, fully independent of load and temperature:

- Compensated for temperature/pressure (load).
- Stabilized levelling speed achieved in shortest distance
- Reducing heat generation.
- Controllable Up & Down speeds

Easy to install

- Valve programming after installation in minutes
- No mechanical adjustments needed
- No adjustment required (seasonal or otherwise)

Safe, robust and energy saving

- Integrated over speed valve
- Reduced run times for a more efficient system
- Integrated Jack-side Filter
- Unintended Car Movement Protection Device (A3)

Premium plus features

- Wireless connection to IOS or Android system
- Integrated Hand pump
- Integrated Shut Off valve
- Pressure gauge with shut-off valve



Valve Parameters


Possibility to connect the board to PC, USB, SD, WI-FI.

The Flow meter, pressure and temperature allows to operate with closed ring.



All the parameters are changeable by PC, keyboard, smartphone or tablet.




UP CHARACTERISTICS

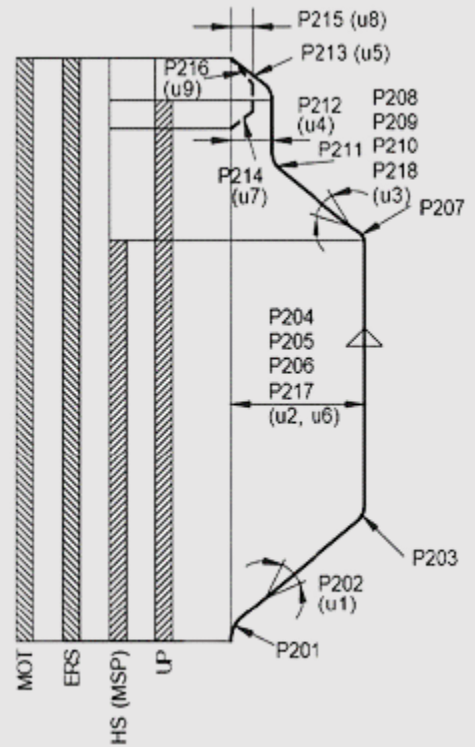

DOWN CHARACTERISTICS

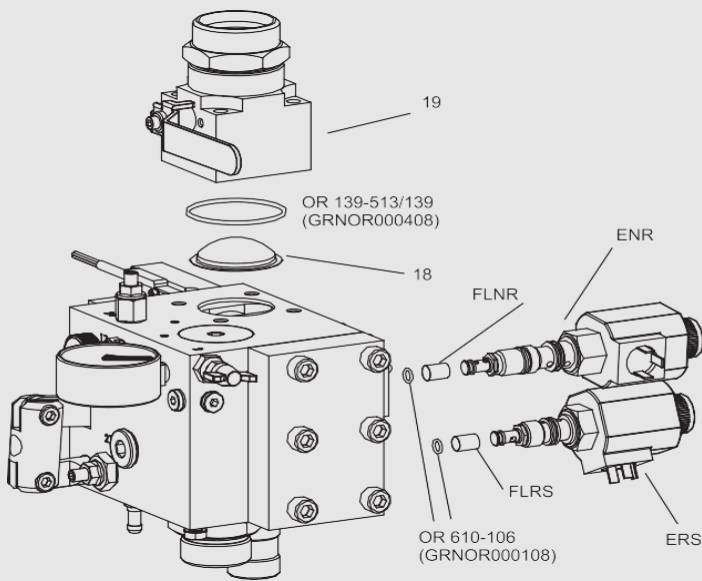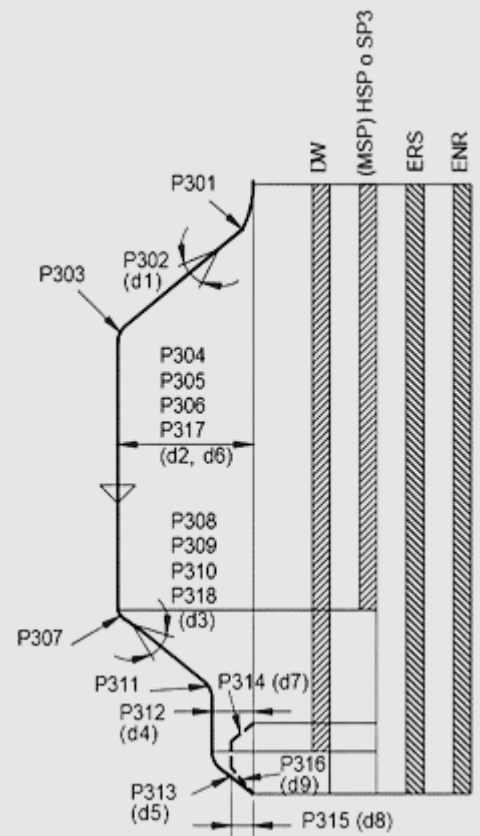


Valve View

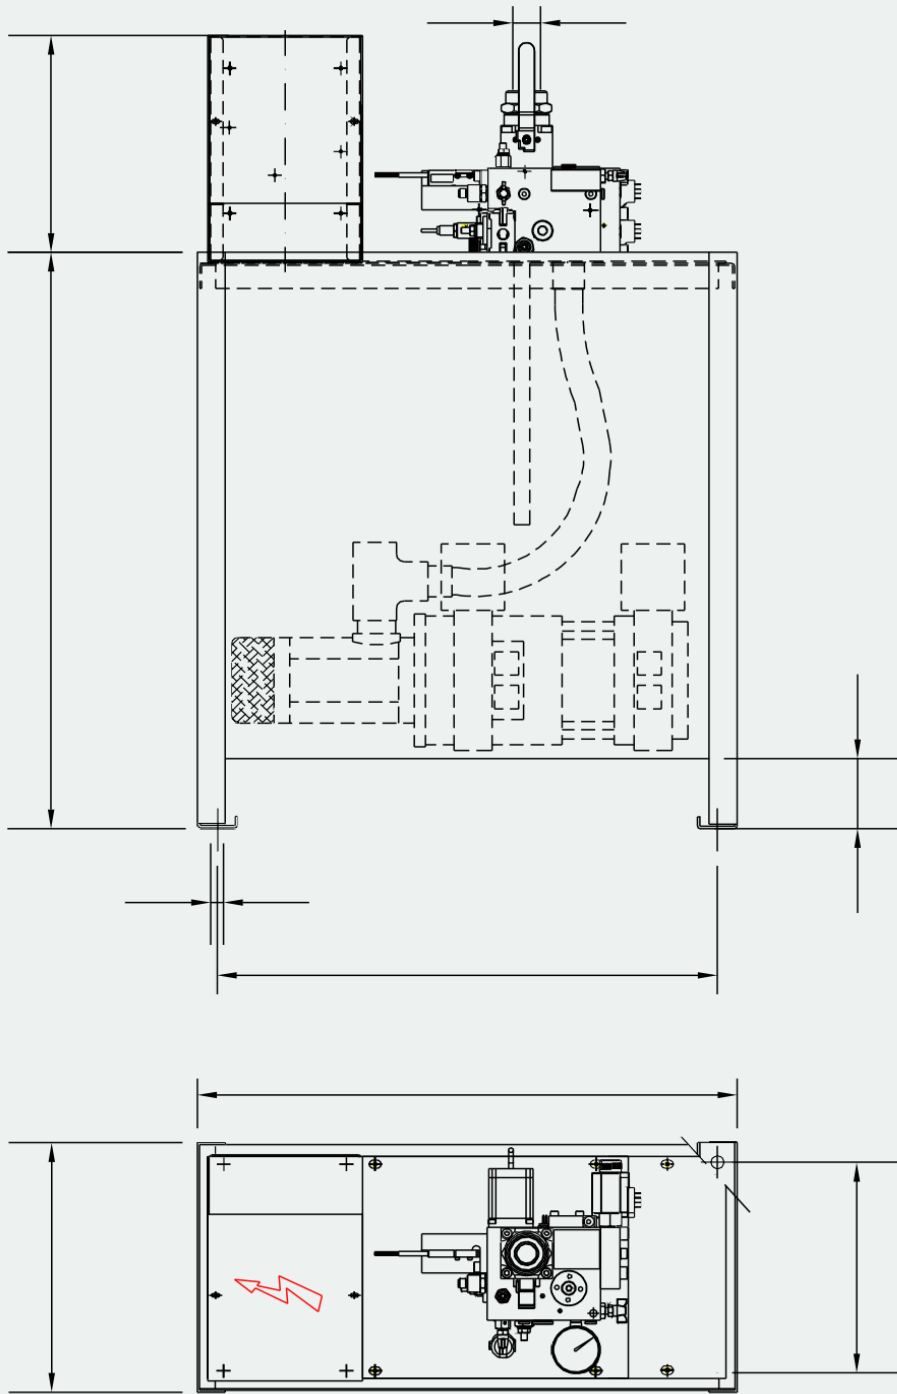


Tank Type	Submersible Pump Flow (Lt/min)	Control Valve	Submersible Motor (Three Phase)(Kw)	Rupture Valve	Hose Pipe	A	B	C	E	F	L	Tank Capacity [Ltr]	Piston Dia [mm]
E lift SPU -SM	100/125/150/250	HEVOS HE 100/250/650	5.8,7.7,9.5,13,20,29	1",1"1/4",1"1/2",2"	1",1"1/2"	680	320	740	270	630	280	145	80/90/100/110/120



HE100

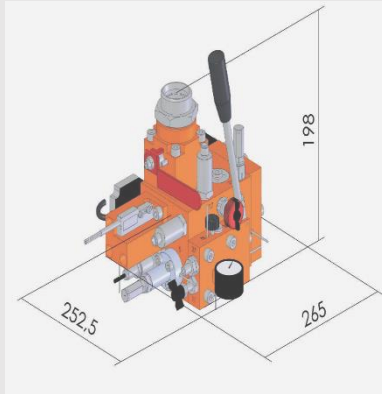

HE250

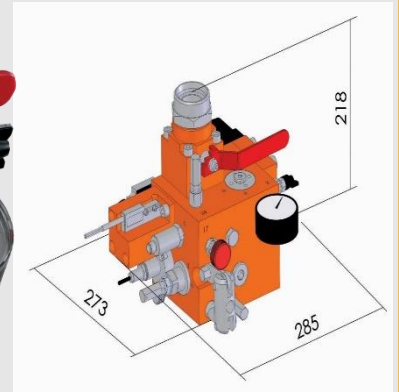

HE650

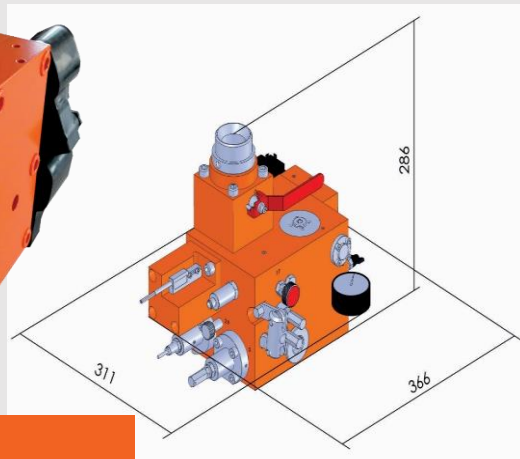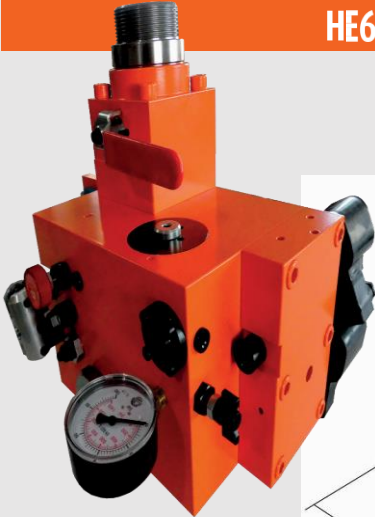

With HEVOS HE Electronic Valve the reduction of travel time is realized in two ways:

- An automatic low speed adjustment in upward and downward included starting time reduction.
- Keeping maximum high speed in all conditions.

The intelligence of the electronic valve managed by the "Self-Learn Mode", automatically feel the weight of the cabin, detects the oil temperature and together with the software compensation capacity, corrects the performance during acceleration and deceleration of each travel defining a comfortable arrival at the floor "on the fly".


Type	Flow range	Temperature Range (Degree Celsius)	Pressure range (bar)
HSe 100	8-150	5-60	10-70
HSe 250	20-250	5-60	10-50
HSe 650	300-700	5-60	10-45

VALVE SKILLS

- Self-learn mode
- Soft-stop function integrated
- No encoder
- VSC Valve Command Stepper Motor
- Wifi connection
- Integrated UCM/A3 device monitoring
- Totally programmable by smartphone

ELECTRONIC CONTROL BOARD

- The power supply voltage of the board must be 24VDC rectified and stabilized.
- SD-CARD parameters and records recovery
- The CAN sockets are interchangeable
- Up to 7 slave group can be managed in cascade

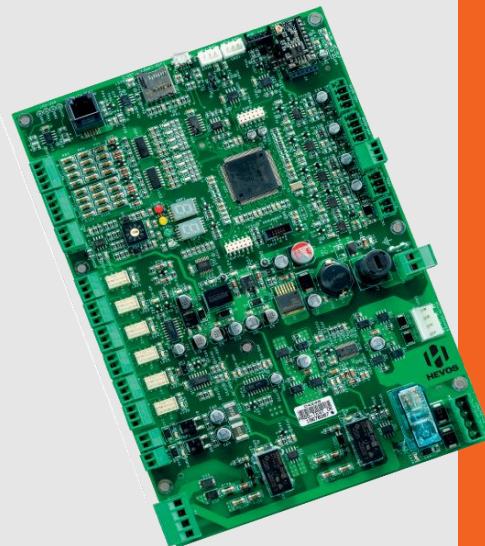

HEVOS
EVOLUTION IS VALVE


Download HEVOS app




COMING SOON

NEW Hevos Valve
Easy and Reliable: HEVOS HS

Keep in touch
info@hevos.it • www.hevos.it

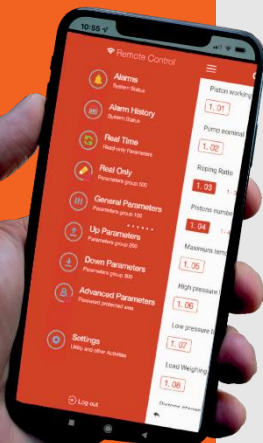


CARFRAME AND OTHER ACCESSORIES

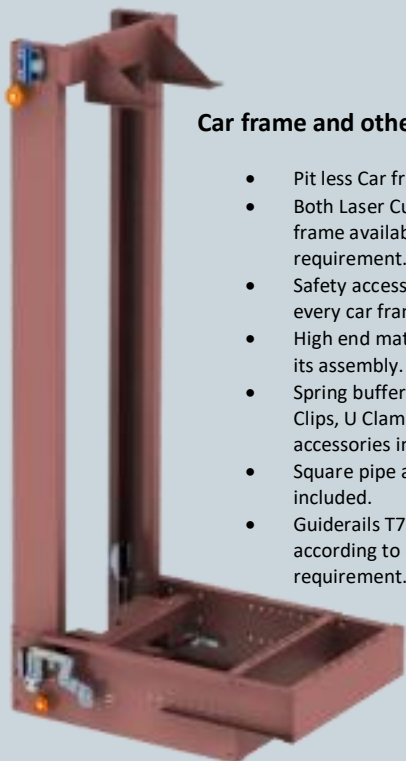



Car frame and other accessories

- Pit less Car frame available.
- Both Laser Cut and C-Channel Car frame available according to requirement.
- Safety accessories provided in every car frame.
- High end material for pulley and its assembly.
- Spring buffers, Thimble rods, Clips, U Clamps and other accessories included.
- Square pipe and piston brackets included.
- Guiderails T70, T45, T89 available according to customer requirement.

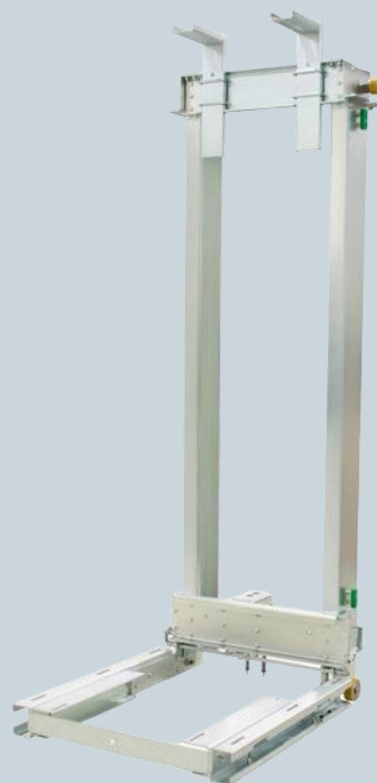

Rupture Valves

- Available in flows upto 600 L / min
- Available in different versions (1", 1 1/4", 1 1/2", 2")
- CE certified and TUV certified

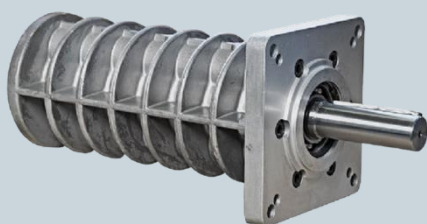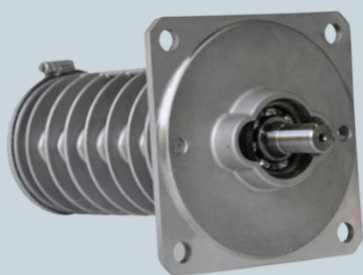


Submersible Screw Pump

- Noiseless and smooth application
- Filter available in the pump.
- Available from 25 LPM to 250 LPM

Submersible Motors

- Both Single Phase and Three Phase available.
- Imported Motor from Europe.
- Aluminum body with highest quality copper windings
- International 1 year warranty on motor.
- Sizes from 2.2 Kw to 22 Kw





CERTIFICATO N. 12154/04/S
CERTIFICATE No.

SI CERTIFICA CHE IL SISTEMA DI GESTIONE PER LA QUALITÀ DI
IT IS HEREBY CERTIFIED THAT THE QUALITY MANAGEMENT SYSTEM OF

START ELEVATOR SRL

LOC. INCROCIATA, 1 29010 Calendasco (PC) ITALIA
NELLE SEGUENTI UNITÀ OPERATIVE / IN THE FOLLOWING OPERATIONAL UNITS

LOC. INCROCIATA, 1 29010 Calendasco (PC) ITALIA

È CONFORME ALLA NORMA / IS IN COMPLIANCE WITH THE STANDARD

ISO 9001:2015

PER I SEGUENTI CAMPI DI ATTIVITÀ / FOR THE FOLLOWING FIELD(S) OF ACTIVITIES

PROGETTAZIONE E PRODUZIONE DI COMPONENTI OLEODINAMICI PER ASCENSORI ED ALTRI APPARECCHI DI
SOLLEVAMENTO

IAF:18

DESIGN AND PRODUCTION OF OLEODYNAMIC COMPONENTS FOR LIFTS AND OTHER LIFTING EQUIPMENT

La validità del presente certificato è subordinata a sorveglianza periodica annuale / semestrale ed al riesame completo del sistema di gestione con periodicità triennale

The validity of this certificate is dependent on an annual / six monthly audit and on a complete review, every three years, of the management system

L'uso e la validità del presente certificato sono soggetti al rispetto del documento RINA: Regolamento per la Certificazione di Sistemi di Gestione per la Qualità

The use and validity of this certificate are subject to compliance with the RINA document : Rules for the certification of Quality Management Systems

Prima emissione First Issue	21.12.2004	Data decisione di rinnovo Renewal decision date	14.01.2022
Data scadenza Expiry Date	17.01.2025	Data revisione Revision date	14.01.2022

Jacopo Ferrando

Genoa & Milan Management
System Certification, Head



SGQ N° 002 A

Membro degli Accordi di Mutuo
Riconoscimento EA, IAF e ILAC
Signatory of EA, IAF and ILAC
Mutual Recognition Agreements

RINA Services S.p.A.
Via Corsica 12 - 16128 Genova Italy



www.cisq.com

CISQ è la Federazione Italiana di Organismi di
Certificazione dei sistemi di gestione aziendale
CISQ is the Italian Federation of
management system Certification Bodies



**START
ELEVATOR**
OLEDDYNAMIC COMPONENTS FOR LIFTS

START ELEVATOR SRL

29010 Incrociata di Calendasco (PC) - ITALIA
Tel. 0039 0523 771131 - 772774

START ELEVATOR INDIA PVT LTD

Office - 4-B-92-Gami Industrial Park
Behind IKEA, Pawne MIDC, Turbhe,
Navi Mumbai, Maharashtra, INDIA
+91 9004601715

Warehouse -J3, Shivkrupa Commercial Complex,
behind Modi Hyundai showroom,
Near reliance petrol pump, Kongaon,
Kalyan.
Pin code - 421311

www.startelevator.in
www.startelevator.it
info@startelevator.in
india@startelevator.it